

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 February 2002 (21.02.2002)

PCT

(10) International Publication Number
WO 02/14738 A1

(51) International Patent Classification⁷: F21L 4/00,
F21V 13/04, F21K 7/00

SIU CHEONG, Ellis; Flat 6, Block E, 29/F, Sunshine
City, Ma on Shan, N.T. (CN).

(21) International Application Number: PCT/US01/41035

(74) Agent: CAGLAR, Oral; Sheppard Mullin Richter &
Hampton LLP, 48th floor, 333 South Hope Street, Los
Angeles, CA 90071 (US).

(22) International Filing Date: 18 June 2001 (18.06.2001)

(25) Filing Language:

English

(81) Designated States (*national*): CA, CN, JP, MX.

(26) Publication Language:

English

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

(30) Priority Data:

09/637,344

11 August 2000 (11.08.2000) US

Published:


— with international search report

(71) Applicant: THE BRINKMANN CORPORATION
[US/US]; 4215 McEwen Road, Dallas, TX 75244 (US).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(72) Inventors: CHAN KA MING, Emil; Room 5, 21/F,
Block 7, Sunshine City, Ma On Shan, N.T. (CN). HON

(54) Title: LED FLASHLIGHT

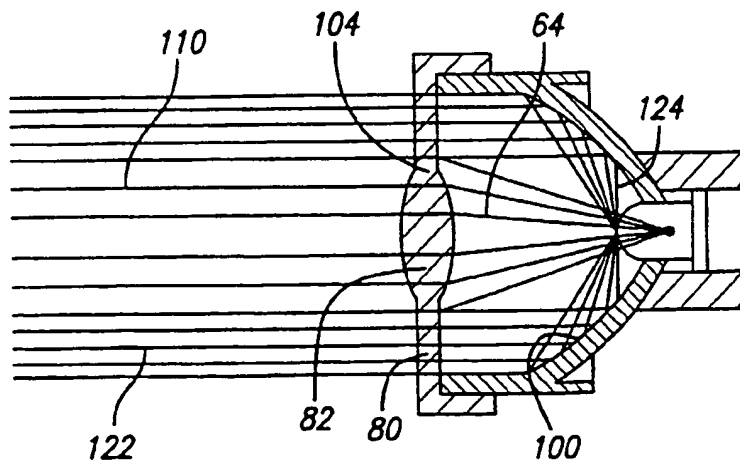

WO 02/14738 A1

(57) Abstract: A flashlight (10) configured to durably provide an effective beam of light for extended periods of time. The flashlight (10) features a high-power, directed LED (60) configured to produce a divergent beam of light (64) that is characterized by an optical directivity angle (68) extending from a vertex point. The flashlight includes a lens (14) having a first portion forming a convergent lens (82), where the LED (60) is located such that its vertex point coincides with the lens' focal point. The convergent lens is sized and positioned such that substantially all of the directed light from the LED passes through the convergent lens portion (82) to emerge in a first beam of parallel light (110). The LED (60) emits additional light (120) through a tip (66). A parabolic reflector (92) has the tip (66) at its focal point to reflect the additional light into a second beam of parallel light (122) that is parallel to and surrounding the first beam (110), thus forming a single and more efficient useful beam. The LED (60) and parabolic reflector (92) are formed into an illuminator assembly (16) that is contained within a housing (12, 18) of the flashlight so as to hold the LED (60) in alignment with its preferred position with respect to the parabolic reflector (92).

LED FLASHLIGHT

BACKGROUND OF THE INVENTION

The present invention pertains to the field of portable or battery-operated lighting products. More particularly, this invention relates to hand-held,
5 battery-operated flashlights.

Flashlights are used to cover a variety of household, workplace and recreational needs. Common flashlights often include a head that contains a relatively fragile incandescent bulb, and a cylindrical body configured to hold batteries. A switch, commonly mounted in the body, completes a circuit between
10 the batteries and the bulb. A parabolic mirror or reflector is located within the head, with the filament(s) of the bulb positioned at the focal point of the mirror. The mirror directs rays of light from the filament forward in a parallel direction, creating a useful beam, as depicted in FIG. 1A. In some cases, such flashlights are provided with rubber o-rings to form a water-tight seal on the flashlight.

15 Many flashlights are stored without usage for great periods of time, and can be then called upon to provide light for long periods with little notice. Other flashlights are used frequently, and can be subject to significant environmental extremes such as shock and temperature. In either case, failure of the flashlight's fragile bulb is an all-to-frequent occurrence, leaving a user without
20 a useful light source. Time efficiency often dictates that the entire flashlight, rather than just the bulb, be replaced, making the loss of a bulb relatively expensive.

As much as 50% of the light produced by the filament will miss the parabolic mirror (in either a forward or rearward direction), causing a large portion of the light to be widely radiated out in many directions, as depicted in FIG. 1B.
25 While this peripheral light is sometimes useful, it is nothing but wasted glare in many situations. Other common problems experienced by such flashlights include

batteries that do not provide light for an adequately extended period, particularly after the flashlight has been in use or in storage. A further problem is that if the bulb filaments are not precisely positioned at the focal point of the parabolic mirror, the light striking the mirror will not be directed in a parallel beam, further reducing the effectiveness and efficiency of the flashlight.

Accordingly, there has existed a definite need for a durable flashlight configured to provide an effective useful beam for an extended period, particularly after extended storage. The present invention satisfies these and other needs, and provides further related advantages.

10

SUMMARY OF THE INVENTION

The present invention provides a flashlight configured to durably provide an effective useful beam of light for extended periods. The flashlight will typically have low power requirements, and will therefore last for extended periods on a given set of batteries. Because of the low power requirements, it will generally function on the limited power available after a battery has been stored for an extended period.

The flashlight features a high-power, directed LED configured to produce a divergent beam of light characterized by an optical directivity angle extending from a vertex point. Because the flashlight preferably derives all its illumination from the LED, the flashlight will typically have low power requirements and be significantly more durable than a flashlight deriving its light from an incandescent bulb.

Another feature of the invention is that the flashlight includes a lens having a first portion that is convergent, where the LED is located such that its vertex point coincides with the lens' focal point. This feature provides for the

divergent beam of light to be focused into a useful beam of parallel light, providing for efficient use of the often-limited light available from an LED. Preferably, the convergent lens is sized and positioned such that substantially all of the directed light from the LED passes through the convergent lens portion to emerge in a first
5 beam of parallel light.

Yet another feature of the invention is that the flashlight also includes a parabolic reflector. The LED emits additional light through a tip, and the tip is located at a focal point of the parabolic reflector. An advantage of this feature is that at least some, or preferably a substantial portion of the additional light strikes
10 the parabolic reflector to form a second beam of parallel light. The second beam of parallel light preferably passes through a preferably flat lens that does not change the overall direction of the second beam. The second beam is preferably parallel to and surrounding the first beam, thus forming a single and more efficient useful beam.

15 The invention also features an illuminator assembly contained within a housing of the flashlight. The illuminator assembly includes both the LED and the parabolic reflector. This feature advantageously provides for the LED to be held substantially in its preferred position with respect to the parabolic reflector.

Other features and advantages of the invention will become apparent
20 from the following detailed description of the preferred embodiments, taken with the accompanying drawings, which illustrate, by way of example, the principals of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a schematic representation of a useful beam produced by a typical bulb in an ordinary, prior-art flashlight.

5 FIG. 1B is a schematic representation of wasted glare produced by a typical bulb in an ordinary, prior-art flashlight.

FIG. 2 is an exploded perspective view of a flashlight embodying features of the present invention.

FIG. 3A is a front elevational view of the flashlight depicted in FIG. 2.

10 FIG. 3B is a side elevational view of the flashlight depicted in FIG. 2.

FIG. 3C is a rear elevational view of the flashlight depicted in FIG. 2.

15 FIG. 4A is a plan cross-section view of the flashlight depicted in FIG. 2.

FIG. 4B is an elevational cross-section view of the flashlight depicted in FIG. 2.

FIG. 5 is a side elevational view of a directional LED used in the flashlight depicted in FIG. 2.

20 FIG. 6A and 6B are front and side elevational views, respectively, of a lens used in the flashlight depicted in FIG. 2.

FIG. 7A is a side elevational view of a forward portion of the flashlight used in the flashlight depicted in FIG. 2, depicting the directed light from the LED being made parallel by the lens.

FIG. 7B is a side elevational view of nondirected light being emitted
5 by a directional LED due to internal reflection.

FIG. 7C is a side elevational view of a forward portion of the flashlight used in the flashlight depicted in FIG. 2, depicting a significant portion of the emitted non-directional light being made parallel by a parabolic mirror.

FIG. 7D is a side elevational view of a forward portion of the
10 flashlight used in the flashlight depicted in FIG. 2, depicting both the directed LED light and a significant portion of the emitted non-directional light being made parallel.

FIG. 8 presents specifications of a preferred LED

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 A flashlight 10 according to the present invention is shown in FIGS. 2, 3A-3C and 4A-4B. The flashlight includes a front housing portion 12, a lens 14, an illuminator assembly 16, a body portion 18, a switch assembly 20 and a rear housing portion 22. The front housing portion is a hollow, approximately cylindrical tube with a forward-facing orifice 30 at a front end 32 and a threaded,
20 rearward-facing opening 34 at a rear end 36. The rear housing portion is a hollow, approximately cylindrical tube with a threaded, forward-facing opening 40 at a front end 42 and a rearward facing orifice 44 at a rear end 46. The rear end of the front housing portion and the front end of the rear housing portion are configured to

threadedly engage each other, forming a cylindrical, hollow housing to contain the lens, illuminator assembly, body portion and switch assembly.

5 The flashlight 10 is configured with a first rubber o-ring 50 conformingly received between the lens 14 and the front end 32 of the front housing portion 12, to form a watertight seal over the forward-facing orifice 30. Likewise, the flashlight 10 is configured with a rubber cap 52 conformingly received between the lens switch assembly 20 and the rear end 46 of the rear housing portion 22, to form a watertight seal over the rearward-facing orifice 44. Additionally, the flashlight is configured with a second o-ring 54 between the rear end 36 of the front
10 housing portion and the front end 42 of the rear housing portion 22, forming a watertight seal between the front and rear housing portions. Thus, the housing (i.e., the combined front and rear housing portions) is watertight.

With reference to FIGS. 4A, 4B and 5, the illuminator assembly 16 has a high-power, white LED 60. Preferably the LED is the only light source in the
15 flashlight, as preferably no bulb is present. The LED has a filament 62 that produces rays of light when energized. The LED also has a built-in, parabolic micro reflector 63 that directs a significant portion (preferably more than 50%) of the filament's light rays in a divergent beam 64 from a vertex point through a transparent tip 66 of the LED over a directivity angle 68, preferably of 20 degrees.
20 The vertex point is normally the location of the filament. Preferably around 10% of the light from the filament is emitted directly into the divergent beam without first reflecting off the micro reflector.

A preferred LED is the High-power White LED, NSPW500BS, by NICHIA CORPORATION of Japan. It includes stoppers to aid in positioning the
25 LED, and has a preferred electrical and optical characteristics, as well as preferred light directivity. The characteristics of the High-power White LED, NSPW500BS, by NICHIA CORPORATION are depicted in FIG. 8

With reference to FIG. 6, the lens 14 is a transparent body having a circular flat portion 80 surrounding a concentric, circular, convergent-lens portion 82. The convergent-lens portion forms a biconvex lens having a focal point 84 on each side of the convergent-lens portion, each focal point being a focal distance away from a focal center point 86 of the convergent-lens portion. A flange 88 surrounds the flat portion 80, adding rigidity to the lens in the vicinity where it will compress the first o-ring 50 against the forward end 32 of the front housing portion 12 (see, FIG. 2). Preferably the lens is made of acrylic plastic by injection molding.

As depicted in FIGS. 2 and 7A, besides the LED 60, the illuminator assembly 16 includes a flange 90, a parabolic portion 92, support legs 94, and a printed circuit board 96 mounting circuitry 98 configured to make the LED compatible with battery power levels that are available in the flashlight. A parabolic inner face 100 of the parabolic portion 92 is a reflective, preferably mirror-like surface, having a focal point. Likewise, an inner face 102 of the illuminator assembly's flange 90 is a reflective, preferably mirror-like surface.

The illuminator assembly's flange 90 is sized and shaped to be conformingly received within the lens' flange 88 and against a peripheral portion of the lens' circular flat portion 80, thereby serving to position the LED 60 with respect to the lens' convergent-lens portion 82. In particular, the LED's filament 62 is positioned at the focal point 84 of the convergent-lens portion 82, and the divergent beam 64 is centered on the focal center point 86 of the lens. Additionally, the convergent-lens portion 82 is sized such that the outer limits of the beam preferably pass through the convergent-lens portion, and most preferably through a periphery 104 of the convergent-lens portion. In other words, the relationship between the diameter of the convergent-lens portion D , the focal distance L , and the directivity angle 68 is preferably stated as follows:

$$D \geq 2 L \tan(A / 2)$$

Most preferably the above equation is an equality. As a result of the above-described configuration, a divergent beam 64 produced by the LED 60 will pass through the convergent-lens portion 82 to become a first parallel beam 110 of light, having a diameter of D, as shown in FIG. 7A.

5 As seen in FIG. 7B, some light emitted by the LED's filament 62 does not get directed by the micro reflector 63 into the divergent beam, and does not enter the divergent beam directly. Instead, after total internal reflection, it reaches the transparent tip 66 and exits the LED 60 in a direction extending outside the divergent beam. This is typically accentuated by passing through the tip at an angle
10 not normal to the surface of the tip at that location, causing the light to refract to an angle further outside the divergent beam.

With reference to FIGS. 7B and 7C, a significant portion of this side-emitted light 120 extends from the tip 66 of the LED 60 toward the reflective inner face 100 of the parabolic portion 92. The illuminator assembly 16 is configured
15 such that the tip of the LED is located at the focal point of the parabolic surface. Thus, the side-emitted light 120 that strikes the inner face 100 of the parabolic portion 92 reflects to form a second parallel beam of light 122.

As seen in FIG. 7D, preferably the parabolic inner face 100 is sized and positioned such that the second parallel beam 122 is parallel to the first parallel
20 beam 110. Likewise, preferably the parabolic inner face 100 is sized and positioned such that light emitted in a direction normal 124 to the center of the directed beam reflects off the inner face and then passes through the circular flat portion 80 immediately outside the periphery 104 of the convergent-lens portion 82. Thus, most of the light produced by the LED, and preferably more than 90% of the light,
25 will be directed in a parallel, useful beam.

Because such a large portion of the generated light is in the useful beam, the total amount of light emitted by the LED's filament (which is typically

substantially less than that of an incandescent bulb) is adequate to produce a useful beam. Furthermore, the LED uses substantially less energy, extending battery life of the flashlight by a substantial margin, preferably to at least 50 hours with two AA batteries. This is roughly 20 times the battery life of common flashlights. Even
5 after extended storage, the LED can continue to function on the reduced battery power that is available. Furthermore, because LEDs are not as fragile and short lived as incandescent bulbs, the flashlight preferably has an effectively infinite bulb life (up to approximately 100,000 hours) with high durability and little likelihood of LED failure due to rough handling.

10 Returning to FIGS. 2, 4A and 4B, the parabolic portion 92 is supported with respect to the circuit board 96 by the support legs 94. The LED 60 is mounted directly in the circuit board, and thus the support legs and circuit board contribute to holding the LED in position with respect to the parabolic portion and the lens 14. The circuit board and its associated circuitry 98 provide the power to
15 energize the LED.

The circuit board is sized and otherwise configured to be received within a holding-cavity 128 in the body portion 18. The power is provided to the circuit board through lead wires 130 connecting to contacts 132 in the body portion 18. The body portion includes compartments 134 for holding two batteries 136,
20 where the contacts are positioned in the compartments to contact the batteries.

The circuit including the two batteries 136, the circuit board 96 and its associated circuitry 98 and the LED 60 also passes through two contacts 140 on the switch assembly 20. When a person depresses the rubber cap 52, which extends through the rearward facing orifice 44, the switch assembly alternates between
25 opening and closing the circuit, thereby alternating the flashlight between an "on" and an "off" state.

From the foregoing description, it will be appreciated that the present invention provides a durable flashlight, which is water and shock resistant, configured to provide an effective useful beam for an extended period, particularly after extended storage. While a particular form of the invention has been illustrated and described, it will be apparent that various modifications can be made without departing from the spirit and scope of the invention. Thus, although the invention has been described in detail with reference only to the preferred embodiments, those having ordinary skill in the art will appreciate that various modifications can be made without departing from the invention. Accordingly, the invention is not intended to be limited, and is defined with reference to the following claims.

We Claim:

1. A flashlight, comprising:
a high-power, directed LED configured to produce a divergent beam of light that is characterized by an optical directivity angle extending from a vertex point; and
5 a lens having at least a portion that is convergent, being characterized by a focal point, wherein the LED is located such that its vertex point coincides with the lens' focal point.
2. The flashlight of claim 1, wherein the lens is sized and positioned such that substantially all of the directed light from the LED passes through the convergent lens to emerge in a first beam of parallel light.
3. The flashlight of claim 1, wherein:
the divergent beam of light exits the LED through a tip portion; and
additional light exits the tip portion of the LED in a direction extending outside of the beam of light; and
5 further comprising a parabolic reflector having a focal point, wherein the focal point of the parabolic reflector coincides with the location of the tip portion of the LED so as to cause the parabolic reflector to reflect at least some of the additional light into a second beam of parallel light.
4. The flashlight of claim 3, wherein:
the lens includes a non-convergent portion configured such that light passing through the non-convergent portion of the lens exists the lens at the same angle it enters the lens; and
5 the second beam of parallel light is parallel to the first beam of parallel light.
5. The flashlight of claim 4, wherein the non-convergent portion of the lens surrounds the convergent portion of the lens.

6. The flashlight of claim 1, and further comprising:
a switch;
one or more battery compartments configured to hold batteries, the battery compartments having contacts that are connected in a circuit that includes the LED
5 and the switch such that the switch can close and open the circuit to energize and deenergize the LED when batteries are installed in the battery compartments; and
a housing configured to house the LED, the lens, the switch and the battery compartments.
7. A flashlight, comprising:
a high-power, directed LED configured to produce a divergent beam of light, wherein the divergent beam of light exits the LED through a tip portion, wherein additional light emanates from the tip portion of the LED in a direction extending
5 outside of the beam of light;
a parabolic reflector having a focal point, wherein the focal point of the parabolic reflector coincides with the location of the tip portion of the LED so as to cause the parabolic reflector to reflect at least some of the additional light into a second beam of parallel light.
8. The flashlight of claim 6, wherein the lens includes a non-convergent portion configured such that light passing through the non-convergent portion of the lens exits the lens at the same angle it enters the lens.

9. An illuminator assembly for insertion into a flashlight having a lens, comprising:

a high-power, directed LED configured to produce a divergent beam of light, wherein the divergent beam of light exits the LED through a tip portion, wherein
5 additional light exits the tip portion of the LED in a direction extending outside of the beam of light;

a parabolic reflector having a focal point, wherein the LED is physically held relative to the parabolic reflector in a position where the focal point of the parabolic reflector coincides with the location of the tip portion of the LED so as to cause the
10 parabolic reflector to reflect at least some of the additional light into a second beam of parallel light.

10. A flashlight, comprising:

an illuminator assembly including an LED, a printed circuit board and a parabolic reflector,

wherein components are mounted on the printed circuit board,
5 wherein the LED is a high-power LED having a filament, a parabolic micro-reflector and a transparent tip, the LED being mounted in the printed circuit board,

wherein the parabolic reflector is connected to the printed circuit board such that the focal point of the parabolic reflector coincides with the
10 transparent tip, and

wherein the parabolic reflector has a flange;
a housing conformingly receiving the illuminator assembly so as to contain the illuminator assembly within the housing.

11. The flashlight of claim 9, and further comprising a body portion defining one or more battery compartments configured to receive one or more batteries, wherein:
the illuminator assembly is conformingly received by the body portion; and
the housing conformingly receiving the body portion so as to contain the
5 body portion within the housing.

12. The flashlight of claim 9, and further comprising a lens, wherein:
the LED is configured to emit light from its filament and produce a divergent beam of light that is characterized by an optical directivity angle extending from a vertex point, and that also produces additional light extending in a direction outside
5 of the divergent beam and emanating from the tip of the LED;

the lens has a first portion that is convergent, being characterized by a focal point, wherein the LED is located such that its divergent-beam vertex point coincides with the lens' focal point;

the divergent beam substantially passes through the lens' first portion to form
10 a first parallel beam of light;

the lens has a second portion that passes light without changing its direction;
and

the parabolic reflector reflects at least a portion of the additional light into a second parallel beam of light that is parallel to the first parallel beam of light.

13. A flashlight, comprising:

an LED having a filament, a parabolic micro-reflector and a transparent tip,
the LED being configured to emit light from its filament and to emit that light in a
divergent beam of light characterized by an optical directivity angle extending from
a vertex point, and the LED being configured to also emit additional light extending

in a direction outside of the divergent beam and emanating from the tip of the LED;
a means for focusing the divergent beam of light into a first parallel beam of
light; and

a means for focusing the additional light into a second parallel beam of light;

wherein the first and second beams of light are parallel.

14. A method of focusing the light from an LED having a filament, a parabolic
micro-reflector and a transparent tip, the LED being configured to emit light from
its filament and to emit that light in a divergent beam of light characterized by an
optical directivity angle extending from a vertex point, and the LED being
configured to also emit additional light extending in a direction outside of the
divergent beam and emanating from the tip of the LED, comprising:

focusing the divergent beam of light into a first parallel beam of light; and

focusing the additional light into a second parallel beam of light;

wherein the first and second beams of light are parallel.

1/4

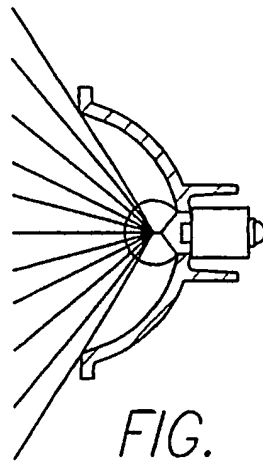


FIG. 1B
PRIOR ART




FIG. 1A
PRIOR ART

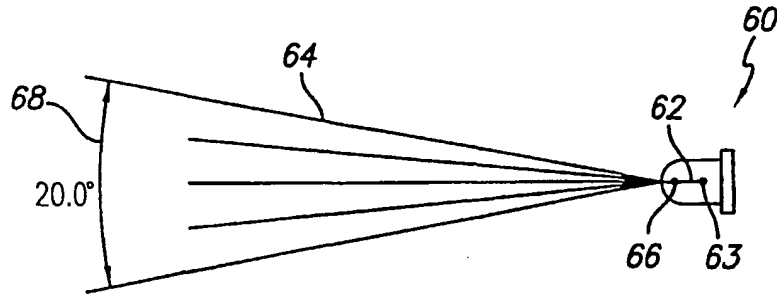


FIG. 5

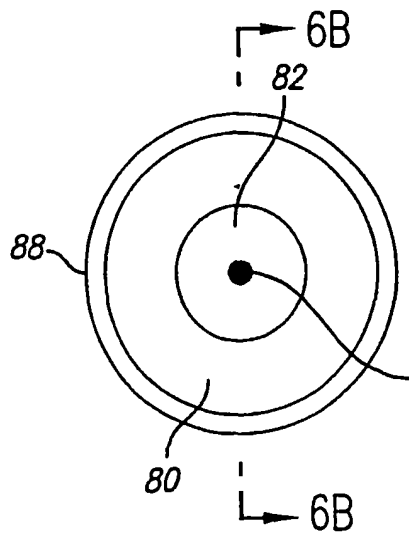


FIG. 6A

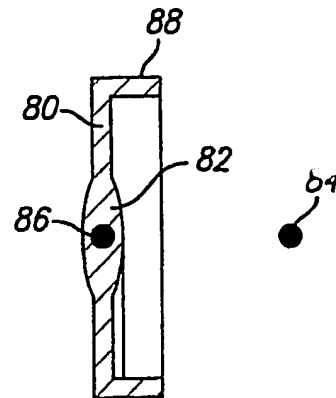


FIG. 6B

2/4

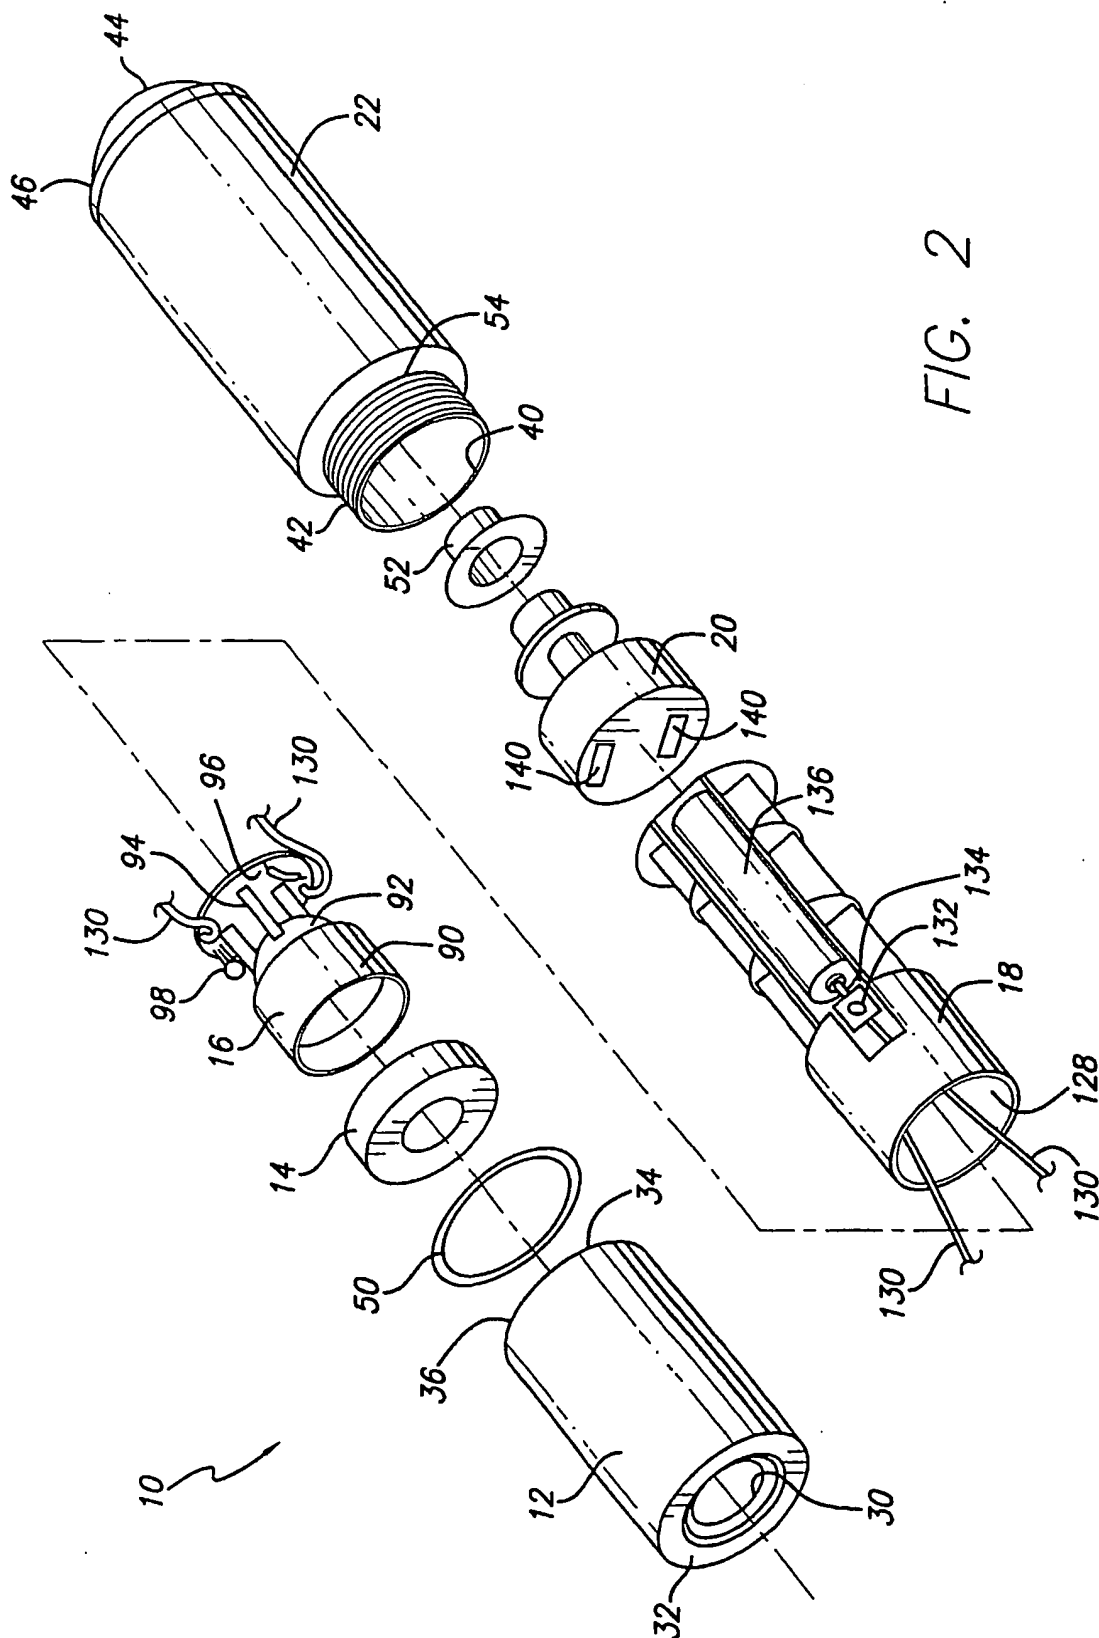


FIG. 2

3/4

FIG. 4A

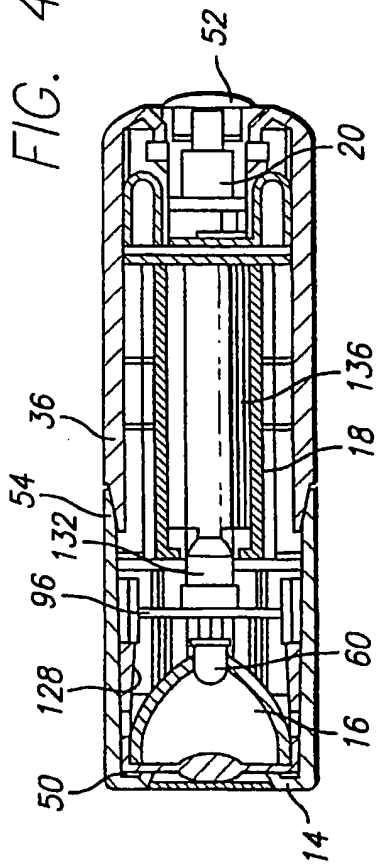


FIG. 3A




FIG. 3C




FIG. 3B

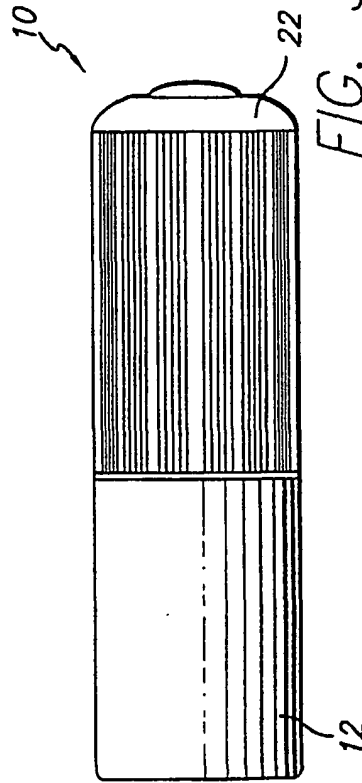
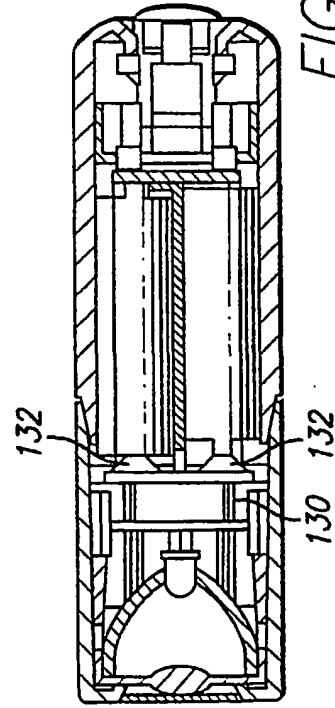


FIG. 4B



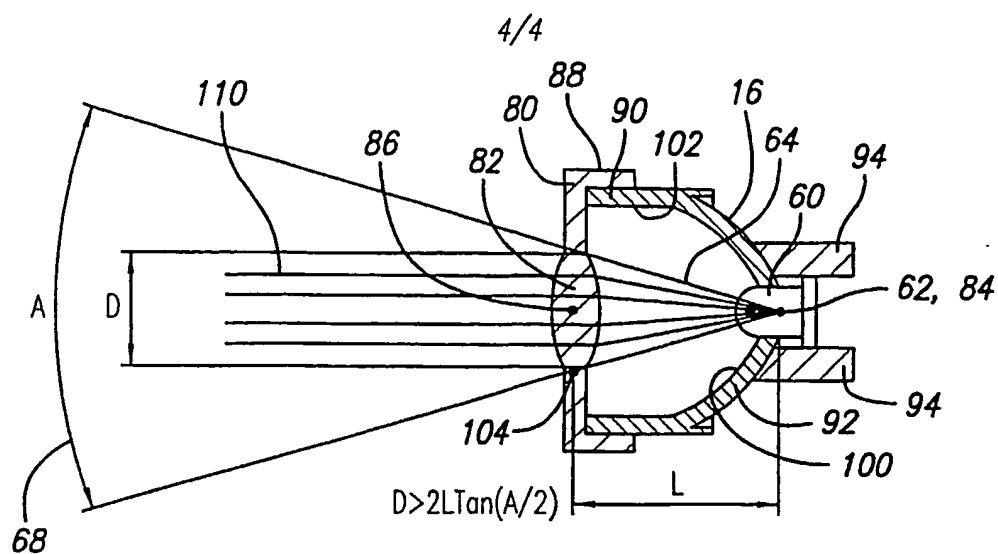


FIG. 7A

A=DIRECTIVITY ANGLE OF LED
D= DIAMETER OF BICONVEX LENS




FIG. 7B

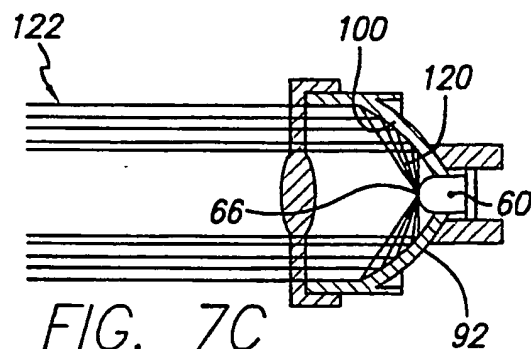


FIG. 7C

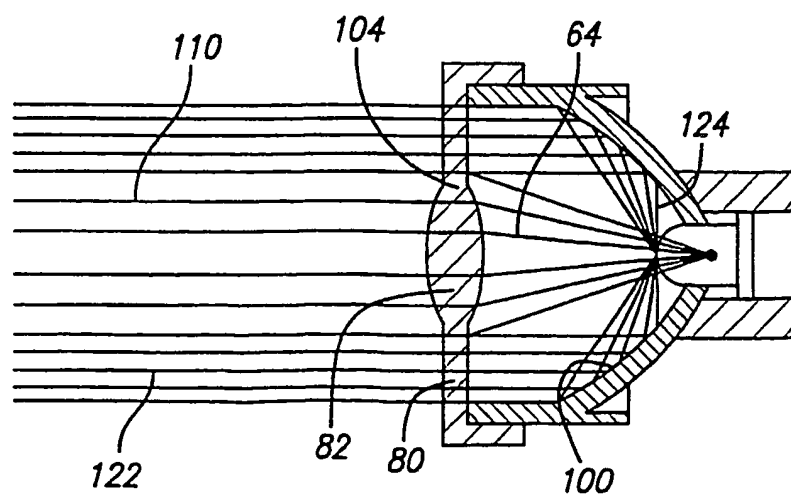


FIG. 7D

INTERNATIONAL SEARCH REPORT

Intern Application No

PCT, 00 01/41035

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F21L4/00 F21V13/04 F21K7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F21L F21K F21V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 490 045 A (LINDNER HENRY) 6 February 1996 (1996-02-06) abstract column 2, line 38-65 column 4, line 51-53 column 6, line 6-16 column 6, line 41-45 column 7, line 62 -column 8, line 56 figures 1,4,6,14,25 ---	1,2,6
Y A	US 4 530 040 A (PETTERSON TOR H) 16 July 1985 (1985-07-16) abstract column 1, line 5-10 column 1, line 52 -column 2, line 35 column 3, line 48 -column 4, line 17 column 4, line 41-43 figures 1-7 --- -/--	1,2,6, 13,14 9,10,12



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

24 October 2001

Date of mailing of the international search report

02/11/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Aubard, S

INTERNATIONAL SEARCH REPORT

Inten d Application No

PCT/US 01/41035

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 093 768 A (OHE KOUJI) 3 March 1992 (1992-03-03)	7,9,10
Y	abstract	11,13,14
A	column 1, line 45 -column 2, line 23 column 3, line 1 -column 4, line 26 figures 1-4	1,3
Y	GB 810 256 A (SUNBEAM MFG COMPANY LTD) 11 March 1959 (1959-03-11)	11
A	page 1, line 13-51 page 2, line 16-26 figures 1,2	8-10
A	DE 200 00 069 U (ZWEIBRÜEDER STAHLWARENKONTOR G) 30 March 2000 (2000-03-30) page 4, paragraph 4 page 6, paragraph 4 -page 7, paragraph 1 figures 1-3	9,10
A	US 4 635 171 A (BEISWENGER JOHN L) 6 January 1987 (1987-01-06) column 1, line 63-68 column 2, line 8-13 column 2, line 50-60 column 3, line 60 -column 4, line 22 column 4, line 53-56 figures 1-3	1

INTERNATIONAL SEARCH REPORT

tion on patent family members

Interr

Application No

PC1, __ 01/41035

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5490045	A	06-02-1996	NONE	
US 4530040	A	16-07-1985	EP 0156561 A1	02-10-1985
US 5093768	A	03-03-1992	NONE	
GB 810256	A	11-03-1959	NONE	
DE 20000069	U	30-03-2000	DE 20000069 U1	30-03-2000
			EP 1081425 A2	07-03-2001
			EP 1114962 A2	11-07-2001
US 4635171	A	06-01-1987	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)